

## Product Update

Changes have been made to the CV3106-01 Drive Bracket. These enhancements were prompted by customer feedback and feature some minor structural modifications to the drive bracket assembly. We have outlined the specific changes to the bracket below.

The new part number for this assembly is CV3002-A. This part includes the upgraded drive bracket, spring clip, drive gear cover, and drive reducing gears.


### Key Features of the Drive Bracket Upgrade:

1. Slot spacing for the motor has been widened, offering more flexibility for motor installation.
2. An enhanced support base for micro-switch mounting posts has been added on the bottom to eliminate flexing of the assembly.
3. The right side wall has been lowered. This allows for better fits for Molex connectors and prevents connectors from bending after coming in direct contact with the side wall.

Old Drive Bracket



New Drive Bracket Assembly

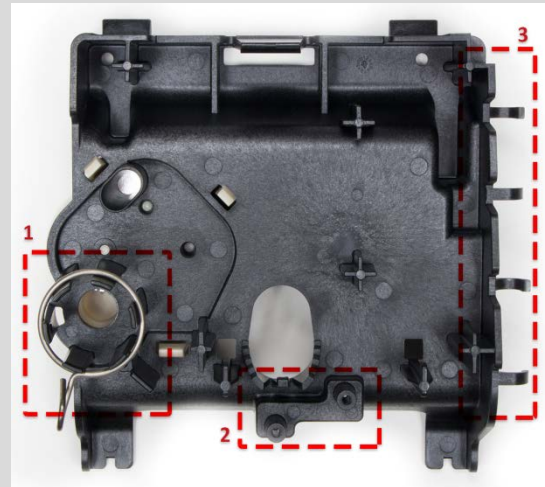

This is a running update, which means these upgraded drive brackets will be integrated into production as the inventory of the current stock decreases. Outside of the changes listed above, the updated bracket is structurally identical to its predecessor and is directly interchangeable with older parts. In the future, production may revert back to the older version if needed.

For any questions regarding this upgraded drive bracket, please contact Water-Right Group with the contact information at the bottom of this bulletin.

Thank you.

-The Water-Right Group