




Sanitizer Plus Series™ Specifications

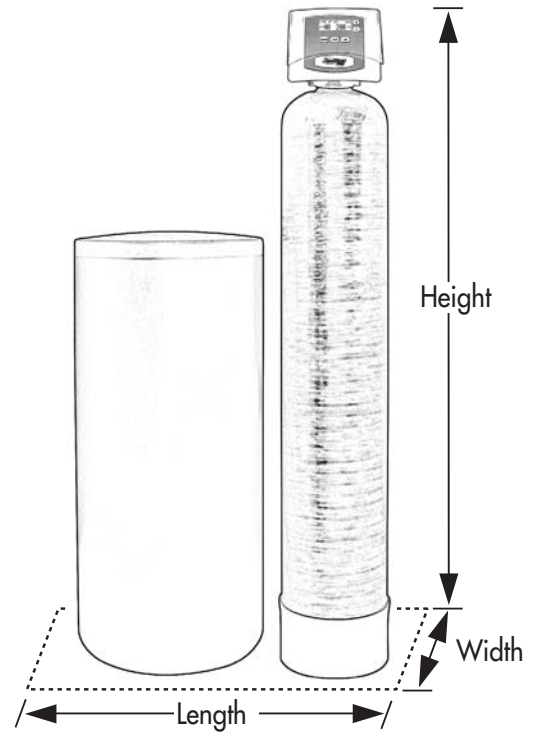

MODEL		ASP1-1044	ASP1-1054	ASP1-1354	ASP2-1044	ASP2-1054	ASP2-1354
¹ Capacity: (Grains/Lbs. NaCl)	Maximum	11,800 @ 12.4	22,600 @ 15.9	36,900 @ 21.2	20,300 @ 12.4	34,800 @ 15.9	60,300 @ 26.5
	Medium	11,400 @ 9.3	20,700 @ 12.4	33,600 @ 15.9	19,100 @ 9.3	32,000 @ 12.4	48,300 @ 15.9
	Minimum	7,300 @ 3.2	16,400 @ 6.1	28,300 @ 9.5	11,100 @ 3.2	22,900 @ 6.1	28,200 @ 9.3
Amount of Media (Cu. Ft.)		1.0	1.5	2.5	1.0	1.5	2.5
Maximum Water Hardness (GPG)		20	30	40	40	60	80
² Maximum Iron (PPM)		8.0	10.0	15.0	8.0	10.0	15.0
³ Minimum pH Required		6.5	6.0	6.0	7.0	7.0	7.0
⁴ Total pH Adjusted Water at Continuous Flows		630	252	432	NA	NA	NA
⁵ Peak Flow Rate (GPM @ P-PSI)		19 @ 15.0	17 @ 15.0	19 @ 15.0	19 @ 15.0	17 @ 15.0	19 @ 15.0
Continuous Flow Rate (GPM @ P-PSI)		9.0 @ 5.0	8.0 @ 5.0	9.0 @ 5.0	9.0 @ 5.0	8.0 @ 5.0	9.0 @ 5.0
Water Pressure Range (PSI)		25-100	25-100	25-100	25-100	25-100	25-100
Water Temp. (°F)		33-100	33-100	33-100	33-100	33-100	33-100
Electrical Requirements (volts-hertz)		110-50/60	110-50/60	110-50/60	110-50/60	110-50/60	110-50/60
Pipe Size		1"	1"	1"	1"	1"	1"
Total Dimensions:	Media Tank	10"W x 52"H	10"W x 62"H	13"W x 62"H	10"W x 52"H	10"W x 62"H	13"W x 62"H
	Brine Tank	18"W x 33"H	18"W x 33"H	18"W x 40"H	18"W x 33"H	18"W x 33"H	18"W x 40"H

MODEL		ASPR-1044	ASPR-1054	ASPR-1354	ASPR-844
¹ Capacity: (Grains/Lbs. NaCl)	Maximum	32,000 @ 15.0	48,800 @ 21.0	72,800 @ 24.0	25,600 @ 9.0
	Medium	28,400 @ 9.0	44,400 @ 15.0	64,200 @ 18.0	21,600 @ 6.0
	Minimum	23,600 @ 6.0	35,400 @ 9.0	53,000 @ 12.0	15,600 @ 3.0
Amount of Media (Cu. Ft.)		1.0	1.5	2.5	0.85
Maximum Water Hardness (GPG)		75	100	100	50
² Maximum Iron (PPM)		1.0	1.0	1.0	1.0
³ Minimum pH Required		7.0	7.0	7.0	7.0
⁴ Total pH Adjusted Water at Continuous Flows		NA	NA	NA	NA
⁵ Peak Flow Rate (GPM @ P-PSI)		17.1 @ 15.0	14.3 @ 15.0	18.5 @ 15.0	11.4 @ 15.0
Continuous Flow Rate (GPM @ P-PSI)		5.0 @ 2.8	5.0 @ 3.8	5.0 @ 2.4	5.0 @ 5.4
Water Pressure Range (PSI)		25-100	25-100	25-100	25-100
Water Temp. (°F)		33-100	33-100	33-100	33-100
Electrical Requirements (volts-hertz)		110-50/60	110-50/60	110-50/60	110-50/60
Pipe Size		1"	1"	1"	1"
Total Dimensions:	Media Tank	10"W x 52"H	10"W x 62"H	13"W x 62"H	8"W x 52"H
	Brine Tank	18"W x 33"H	18"W x 33"H	18"W x 40"H	18"W x 33"H

¹ All Sanitizer Plus water conditioners are pre-factory set at medium salting. Note: influent waters must be at least 3 GPG hardness and 80 TDS. A calcite or corxex unit may be needed for correct operation.

² Iron removal may vary depending on form of iron, pH and other local conditions. On waters that are pre-chlorinated or where other pre-oxidation occurs, an iron precipitate can form that is too small to be filtered.

³ The pH listed is the minimum for the influent water.

⁴ This is the minimum number of gallons of the continuous flow rate corrected to a 7 pH. The actual amount of pH adjusted water may be greater.

⁵ Unit not tested for capacity at these flow rates. Water quality may vary.

MODEL	ASP1-1044		ASP1-1054		ASP1-1354		ASP2-1044		ASP2-1054		ASP2-1354		ASPR-1044		ASPR-1054		ASPR-1354		ASPR-844	
	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.	MIN.	GAL.
Brine Refill	5:51	3	9:53	5	11:53	6	5:51	3	9:53	5	11:53	6	5:51	3	9:53	5	11:53	6	3:51	2
Backwash	12	42	12	48	12	84	12	36	12	42	12	60	8	22	8	22	10	32	6	10
Brine & Rinse	72	29	90	36	90	72	72	29	90	36	90	72	60	24	90	36	90	47	40	16
Rapid Rinse	4	14	4	16	4	28	4	12	4	14	4	20	4	11	4	11	4	13	4	7
Total	94	88	116	105	118	190	94	80	116	97	118	158	78	60	112	74	116	98	54	35